

Image shown may not reflect actual configuration.

## C27 – C32 GC Enclosures NA

### Sound Attenuated Enclosures for C27 and C32 GC Generator Sets

These sound attenuated, factory installed enclosures are designed for safety and aesthetic value. Rugged construction provides weather protection and the ability to withstand exposure to the elements

## FEATURES

### Robust/Highly Corrosion-Resistant Construction

- Environmentally friendly, polyester powder-baked paint in Caterpillar White
- Zinc Plated and Stainless Steel Fasteners
- 14-Gauge Steel Construction
- Flat Roof with protection for water ingress from Rain
- Critical Grade internally mounted muffler/exhaust system
- Soft Mounted isolators
- 75 dbA @ 7m (Target value) for Sound attenuated enclosures

### Excellent Access

- Control panel mounted on RH side with an optional auxiliary box on the LH side of the package
- Large cable entry area for the ease of installation
- Left-hand or Right-hand bottom entry access to power cable bus or circuit breaker
- Multiple doors on both sides allow easy access to service points
- Hinged doors allow 180° opening rotation
- Lube Oil and coolant drains piped to exterior of enclosure and terminated drain valves
- Radiator fill cover

### Options

- Weather Proof Enclosure available with same footprint
- Interior DC lighting systems
- Caterpillar White Paint (Default)
- 2100 (Factory installed), 3000 and 4200 (shipped loose) gallon fuel tanks
- 100 mph wind loading


### Security and Safety

- Lockable access doors with standard key use
- Cooling fan and battery charging alternator fully guarded
- Oil fill and battery can only be reached via lockable access
- External fuel connections
- Externally mounted emergency stop buttons
- Designed for spreader bar lifting to ensure safety

### Certifications

- UL 2200 listed & cUL
- Seismic certification per applicable building codes: IBC 2018, CBC 2007
- Analysed to withstand 100mph wind loading
- Tested and analysed in accordance with: ASCE 7-98, ASCE 7-02, ASCE 7-05, ICC-ES AC-156

## Enclosure Weights and Dimensions

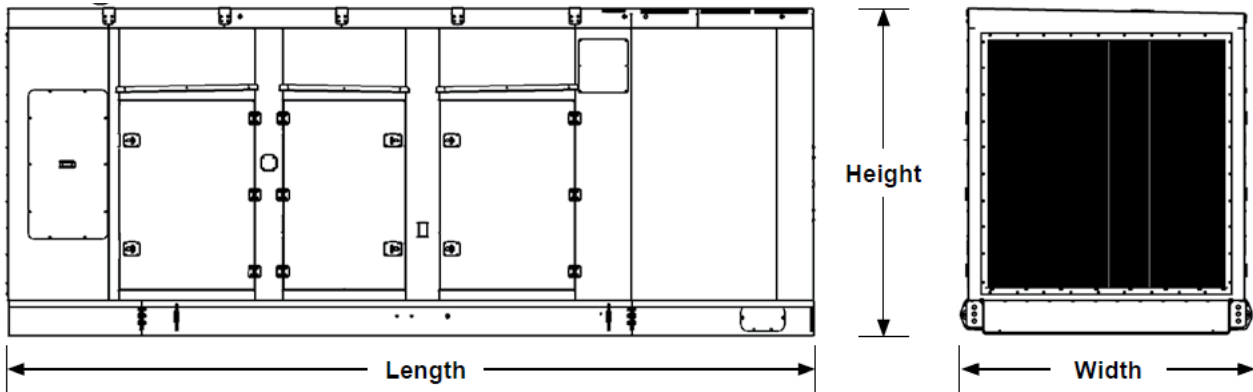

**Note:** For reference only – do not use for installation design. Please contact your dealer for exact weights and dimensions.

Enclosure Base Options*				
	Weight kgs (lbs)	Length mm (in)	Width mm (in)	Height mm (in)
With Lifting Base	2672 (5891)	6196 (244)	2300 (91)	2650 (104)
With 2100 gal integral tank base	4891 (10783)	7620 (300)	2349.5 (93)	3264.4 (129)
With 3000 gal tank with lifting base	5638 (12429)	7645 (301)	2349.5 (93)	2650 (104)
With 4200 gal tank with lifting base	6563 (14468)	7645 (301)	2349.5 (93)	2650 (104)

\*Weight does not include package generator set weight.

## Generator Set Weights

Generator Set Weights**	Weight kgs (lbs)
C27 Open Generator Set	5813 (12815)
C32 Open Generator Set	6798 (14987)

\*\*Dry Weight of heaviest configuration and without base rail weight (Does not include exhaust system weights)

**LET'S DO THE WORK.™**

[www.cat.com/electricpower](http://www.cat.com/electricpower)  
 ©2021 Caterpillar  
 All rights reserved.

Materials and specifications are subject to change without notice. The International System of Units (SI) is used in this publication. CAT, CATERPILLAR, LET'S DO THE WORK, their respective logos, "Caterpillar Corporate Yellow" the "Power Edge" and Cat "Modern Hex" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.