

Indirect Fired Heater - 4000

Applications:

- Job Site/Construction Heat
- General/Building Heat
- Temporary Shelter
- Industrial Heat
- Commercial/Institutional Heating
- 100% Fume Free
- Natural gas, propane or fuel oil




SPECIFICATIONS

Capacity Gross	1,380,000 btu
Capacity Net	1,214,400 btu
Air Volume	14,125 cfm
Outlet Hose Diameter	2 x 24"
Inlet Hose Diameter	2 x 24"
Flue Connection	12"
Duct Length	400 ft.
Voltage	208 V / 3 phase
Frequency Hz	60

Current	30 amps
Chimney Loss	12%
Fuel Consumption	NG 1,314 CFH - LP 15 GPH
Fuel	NG/LP/Fuel Oil
Weight	2,000 lbs.
Dimensions	152" x 47" x 74"
Efficiency	88%
Static Pressure	3.6

- High efficiency heat exchanger (92%).
- Weather resistant & lockable casing.
- High pressure fan for powerful heat distribution.
- Recirculation hose flange possible.

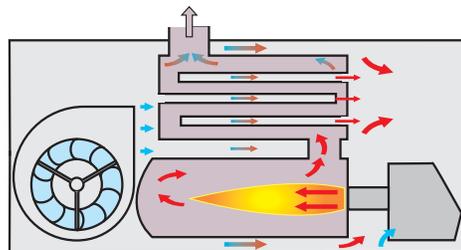

100% clean and dry heat
Outlet temperature circa 104-158°F
Large heat throw

- Combustion chamber heat resistant up to 850°C.
- Lower tray for oil containment during servicing.